




IMPORTANT

SPRING INSTALLATION INSTRUCTIONS


Read carefully prior to installing encoder spring!

In order to properly install the encoder spring, follow these detailed steps.


- 1.) Slide the encoder spring onto drive shaft by rotating the spring counter clockwise on the drive shaft. Install the spring near the bottom of the shaft but avoid making contact between the spring and the flange of drive shaft.

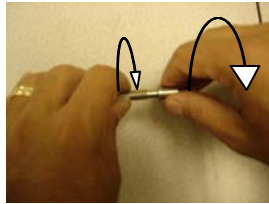

- 2.) Using two fingers grasp the end of the spring. Use your other hand to grasp the spring and rotate it counterclockwise while sliding it onto the encoder shaft. Spring should be slid near the bottom of the shaft but avoid making contact between the spring and the flange of the encoder shaft.

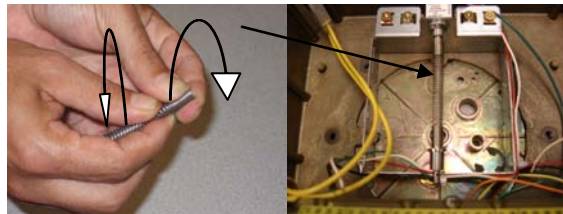

- 3.) Place the drive shaft into the center hole on the bottom of the EMR³ register head. Install the meter coupling as instructed in the EMR³ Installation Guide, Manual No. 577013-758.

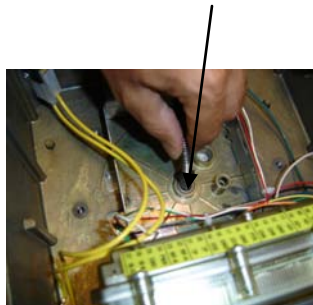

If additional information is required, contact Mechanical / EMR Customer Service at:

800-873-3313 Option 6

Notice

Veeder-Root makes no warranty of any kind with regard to this publication, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose.

Veeder-Root shall not be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance, or use of this publication.

Veeder-Root reserves the right to change system options or features, or the information contained in this publication.

This publication contains proprietary information which is protected by copyright. All rights reserved. No part of this publication may be photocopied, reproduced, or translated to another language without the prior written consent of Veeder-Root.

DAMAGE CLAIMS

1. Thoroughly examine all components and units as soon as they are received. If damaged, write a complete and detailed description of the damage on the face of the freight bill. The carrier's agent *must* verify the inspection and sign the description.
2. Immediately notify the delivering carrier of damage or loss. This notification may be given either in person or by telephone. Written confirmation must be mailed within 48 hours. Railroads and motor carriers are reluctant to make adjustments for damaged merchandise unless inspected and reported promptly.
3. Risk of loss, or damage to merchandise remains with the buyer. It is the buyer's responsibility to file a claim with the carrier involved.

RETURN SHIPPING

For the parts return procedure, please follow the appropriate instructions in the "General Returned Goods Policy" and "Parts Return" section of the Veeder-Root EMR³ price list.