

# Instructions for Retrieving Data for TLS-3XX Series to TLS-450PLUS ATG Upgrade



To help make upgrading your Veeder-Root TLS-3XX Series Automatic Tank Gauge (ATG) to the TLS-450PLUS easy, follow all five steps sequentially to retrieve data needed by your distributor.

Screens referenced below may vary slightly depending on your ATG.

## 1 System Information (Software & Features)

- Start at the **main screen**:  

- Press **MODE** twice:  

- Press **FUNCTION** once:  

- Press **PRINT**

## 2 System Configuration (Modules)

- Press **STEP** four times until you are at the **System Configuration screen**:  

- Press **PRINT**
- Press **STEP** four times until you are at the **DIM Diagnostic Data screen**:  

- Press **PRINT**

## 3 In-Tank Diagnostic (Probes)

- From the DIM Diagnostic Data screen, press **FUNCTION** twice until you are at the **In-Tank Diagnostic screen**:  

- Press **PRINT**

## 4 General Setup (Sensors, Line Leak, and DIMs)


- Press **MODE** once until you see the **Setup Mode screen**:  

- Press **PRINT**

## 5 Final Steps

- Collect your printouts and send them to your distributor to build your **TLS-450PLUS Bill of Materials**.

### YOUR TLS-3XX SERIES

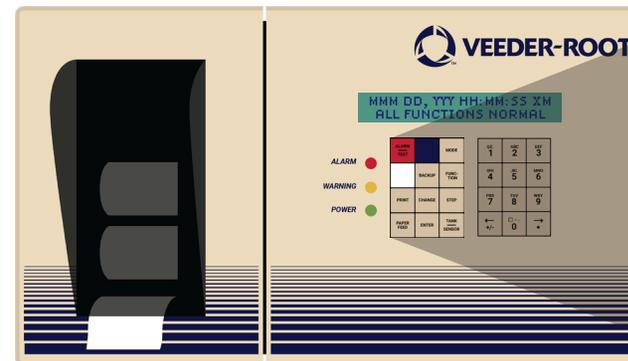

### KEYPAD

ALARM TEST		MODE
	BACKUP	FUNCTION
PRINT	CHANGE	STEP
PAPER FEED	ENTER	TANK SENSOR