
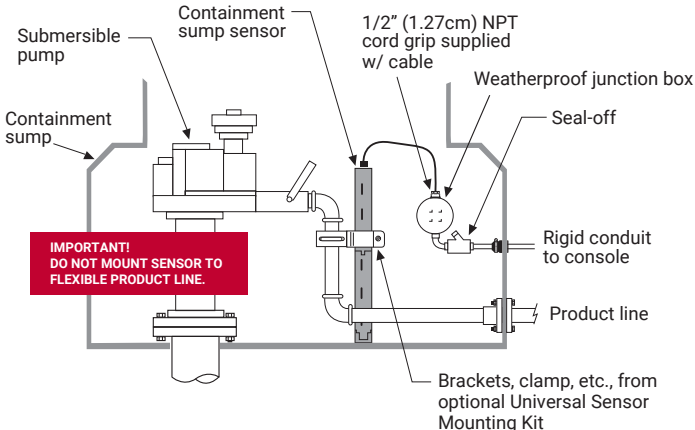


| | | | | | | |
|--|---|---|--|---|-------------------------------|---|
| Sensor Description | Solid-State (Optical)-Discriminating Containment Sump Sensor | | This type of discriminating sensor is installed in a containment sump and will detect the presence of, and differentiate between, hydrocarbons and other liquids. | | | |
| Part Number | 794380-350 | | | | | |
| Category | <input checked="" type="checkbox"/> Discriminating <input type="checkbox"/> Non-Discriminating <input type="checkbox"/> Position Sensitive | | | <input type="checkbox"/> Level Sensing <input type="checkbox"/> Static Testing <input type="checkbox"/> Hydrostatic | | |
| Fuel Compatibility | <input checked="" type="checkbox"/> Gas <input checked="" type="checkbox"/> Diesel <input checked="" type="checkbox"/> Kerosene <input checked="" type="checkbox"/> Jet Fuel <input checked="" type="checkbox"/> Aviation Gas | | | <input checked="" type="checkbox"/> E-15 <input checked="" type="checkbox"/> E-85 ¹ <input type="checkbox"/> E-100 <input checked="" type="checkbox"/> Bio-Diesel 20 <input type="checkbox"/> Bio-Diesel 100 | | |
| | | | <input checked="" type="checkbox"/> Green Diesel <input type="checkbox"/> DEF <input checked="" type="checkbox"/> Waste Oil <input checked="" type="checkbox"/> Motor Oil | | | |
| | | | | | | <div></div> |
| Console Compatibility (*International Only ²) | Recommended Min. Console Software | Sensor Interface Modules | | | | |
| | | Module Part # | Module Description | # of Modules per Console | # of Sensor Inputs per Module | Availability |
| TLS-450PLUS (8600 Series) | 6A or Higher | 332812-001 | Universal Sensor Module (USM) | Up to 4 - TLS-4XX Up to 8 - TLS-4XX w/ opt. TLS-XB | 8 | Sold Separately |
| TLS-450 | 4A or Higher | | | | | |
| TLS4 (8601 Series) ² | 6A or Higher | 330020-750 | Universal Sensor Input Out-put Module (USIOM-AC) | 1 | 6 | Included |
| TLS4i (8601 Series) | | | | | | |
| TLS4B (8601 Series) ² | | 330020-751 | | | 4 | |
| TLS4c (8601 Series) | | | | | | |
| TLS-350/R/PLUS | 124/324 or Higher | 329950-001 | Type B Interface Module | Up to 8 | 6 | Sold Separately |
| TLS-300i | N/A | | | | | |
| TLS-300C | | | | | | |
| Alarm Notification | Normal | Sensor in Normal State - No liquid detected | | | | |
| | Low Liquid | Liquid detected at a minimum of 1.37" (3.48cm) | | | | |
| | High Liquid | Liquid detected at a minimum of 10.3" (26.2cm) | | | | |
| | Fuel Alarm | Permeable material saturated with Fuel | | | | |
| | Sensor Out | Sensor not communicating to ATG/Console | | | | |
| Installation Kit | 330020-012 | Universal Sensor Mounting Kit (Sold separately) | | | | |
| Specifications | | | Example Installation | | | |
| Operating Principle | Electrical conductivity/optical | | <div></div> | | | |
| Product Activation Height | Gas - 0.125" (3.175mm); Water - Low - 1.37" (3.4cm), High - 10.3" (26.2cm) | | | | | |
| Operating Temperature | -40 to +122°F (-40 to +50°C) | | | | | |
| Dimensions | 22.1" (56.1cm) high, 2.2" (5.6cm) dia. | | | | | |
| Miscellaneous/Notes | Standard Cable Length: 12ft (3.66m) | | | | | |
| Third Party Evaluation Links | TLS-350/TLS-450 Series Consoles TLS4 (8601 Series) Consoles | | | | | |
| Product Link | Solid-State Discriminating Containment Sump Sensor | | | | | |
| Warranty with System | 1 Yr Parts & Labor | | | | | |
| Warranty (When purchased separately) | 1 Yr Parts Only | | | | | |
| Where Used (Typical) | | | | | | |
| <div><input type="checkbox"/> Dispenser Pan <input checked="" type="checkbox"/> Spill Containment <input checked="" type="checkbox"/> STP Sump <input type="checkbox"/> Convault Tank</div> <div><input type="checkbox"/> Annular Space <input type="checkbox"/> Monitoring Well <input type="checkbox"/> Oil/Water Separator Tank</div> | | | | | | |

Notice

Veeder-Root makes no warranty of any kind with regard to this publication, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose.

Veeder-Root shall not be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance, or use of this publication.

Veeder-Root reserves the right to change system options or features, or the information contained in this publication.

This publication contains proprietary information which is protected by copyright. All rights reserved. No part of this publication may be photocopied, reproduced, or translated to another language without the prior written consent of Veeder-Root.

Example Illustrations

Illustrations used in this guide for example sensor installations may contain components that are customer supplied and not included with the sensor. Please check with your Veeder-Root Distributor for recommended installation accessories.

Third Party Evaluations

Third party evaluations of the Veeder-Root sensors contained in this application guide can be found under the Veeder-Root vendor name on the National Work Group on Leak Detection Evaluations (NWGLDE) website:

<http://www.nwglde.org>